

## RESEARCH OF THE CHEMICAL COMPOSITION OF CONSTRUCTION MATERIALS BASED ON MINERAL BINDERS

*Shukrullayev Javohir Oybek o'g'li*

*Bukhara Engineering and Technology Institute, Uzbekistan*

[Shukrullayevj654@gmail.com](mailto:Shukrullayevj654@gmail.com)

*Niyozov Sobir Ahror o'g'li*

*Bukhara Engineering and Technology Institute, Uzbekistan*

*Usmonov Oxunjon Odil o'g'li*

*Bukhara Engineering and Technology Institute, Uzbekistan, Master student*

### ABSTRACT

Cement-fibrolite slabs are effectively used as structural heat-preserving fillers for frame constructions of standard wooden houses, to provide thermal protection of thin brick and concrete walls in various agricultural constructions. Also, fibrolite is used as a heat-retaining layer in wall and wall panels in residential construction, and as a heat protector in roof sheathing. Cement-chip boards (CCHB) are a new structural sheet material, made by pressing special wood chips and portland cement mass under high pressure. Sawdust from deciduous and deciduous wood is used as raw material.

**Keywords:** Arbolite block, wall panels, cement-fibrolite plates, arbolite block and panels in construction, Normal compaction of the mixture, when the relative humidity of the environment is higher than 60%, the reinforcement is placed inside the concrete protective layer, and when the humidity is high, the vapor protective layer is placed. installation

### INTRODUCTION

Wood waste (sawdust, sawdust, leaves, etc.) and crushed wood materials (shavings, pieces, branches and twigs) are effectively used as fillers in the production of various materials based on mineral binders. Such materials are characterized by low density (30...800 kg/m<sup>3</sup>) and thermal conductivity of 0.093...0.23 W/(m°C), as well as good workability[2]. By impregnating wood fillers with mineralizers and then mixing them with mineral binders, biological and fire resistance of such materials is ensured. The main disadvantage of materials obtained from wooden fillers is high water absorption and relatively poor water resistance[1].

Depending on the purpose of use, such materials are divided into heat-retaining, constructional - heat-retaining and constructional types[3].

All mineral binders can be used in the composition of wood fillers, especially portland cement is the main one. Fast-hardening cements are used effectively[5].

Compared to cementitious binders, high-strength gypsum ensures fast hardening and allows obtaining low-density high-strength materials (when the consumption of binders is uniform)[4]. Also, it is relatively more convenient to produce wood filler

materials on the basis of high-strength gypsum. Groups of effective materials obtained on the basis of wood waste and fillers and mineral binders include arbolite, fibrolite and opilkobeton (GOST 4598-93, GOST 26988-86, GOST 8994-81, UzRSt 747-96, etc.)[6].

Arbolite is compacted mass consisting of organic fillers (wood shavings, crushed reed, hemp, hemp and straw), cement and water, if necessary, additives. Minerals such as calcium chloride and liquid glass are used as additives (Fig.1)[8].

Products made on the basis of arbolite (panels and blocks) are widely used in industrial, civil and agricultural construction for the construction of external walls and fences, as well as heat-retaining and sound-proofing plates. Arbolite constructions should be used in rooms with a relative humidity of up to 60%. When the humidity is high, it is necessary to install a vapor barrier layer[10].

The surface of arbolite constructions exposed to the external environment is covered with a decorative layer (with a plaster mixture). Arbolite, dried to a constant mass, is divided into heat-preserving ( $\rho_m=500...850 \text{ kg/m}^3$ ) grades (Table 1.1)[11].

Table 1.1

Average density of arbolit

The size of the arbolite	Compression strength class	Average density of arbolite			
		chopped wood	ground cotton stalks	hemp	ground rice stalks
Heat preservation	V 0,35	400...500	400...450	-	500
	V 0,75	450...550	450...500	400..450	-
	V 1,0	500	500	450...500	-
Constructive	V 1,5	500...650	550...650	500	600...700
	V 2,0	500...700	600...700	550...650	—
	V 2,5	600...750	700...800	600...700	—
	V 3,5	700...850	-	—	—

The heat preservation of arbolite depends on its average density and the quality of fillers[12]. For example, the thermal conductivity of arbolite based on chopped wood with an average density of  $400...850 \text{ kg/m}^3$  is on average  $08...17 \text{ W/(moS)}$ , chopped agricultural wood that of arbolite based on plants (hemp, straw, hemp, etc.) is equal to  $0.07...0.12 \text{ W/m}^\circ\text{C}$ [13].

The strength of arbolite is determined by the quality of the wooden filler. In addition, its strength is affected by the density of fillers, cement consumption, C/C (water-cement) ratio, used additives and homogeneity of the structure[14 the 16].

The strength of arbolite mainly depends on its moisture content. This material achieves maximum strength when the moisture content is 16...17%. Its water absorption is relatively high. But the advantage of this material is that it has the ability

to quickly release absorbed water, that is, it dries quickly. Arbolit's cold resistance is determined depending on the conditions of use and the place of construction. In any case, it should not be less than F25.[17].

The composition of arbolite is determined by calculation. Consumption of cement, organic fillers and water depends on the compressive strength of arbolit. For example, cement consumption for heat-retaining arbolite of class V0.35...V1 is 260...360 kg/m<sup>3</sup>, and for structurally stable arbolite of class V1.5...V2.5 is 330... .450 kg/m<sup>3</sup> will be[15]. Low cement consumption is achieved when using pine wood waste and shavings. Consumption of calcium chloride and liquid glass 8...9 kg/m<sup>3</sup>, and aluminum sulfate is 15...20 kg/m<sup>3</sup> [18].

The production technology of arbolite products consists of such processes as the selection of raw materials, the preparation of arbolite mixture and its placement in molds, hardening and drying, processing of the outer part and storage[19].

In addition to non-reinforced arbolite products, products reinforced with steel reinforcements are also produced. When the relative humidity of the environment is higher than 60%, the reinforcement is placed inside the concrete protective layer. Or a protective layer is formed by applying special compounds to the surface of the armature[20].

Arbolite products are produced in the same way as concrete and reinforced concrete products using conveyor, aggregate-flow and stand methods. The arbolite mixture is prepared in forced-motion concrete mixers. The main technological process in the preparation of products is the densification of the mixture to the required density[21]. The arbolite mixture does not obey the general laws corresponding to the properties of the concrete mixture due to the elastic properties of the fillers. Conventional compaction is not very effective in compacting the mixture, and pressing leads to the destruction of the compacted structure. Therefore, in practice, it is necessary to maintain a high water-cement ratio ( $S/S=0.75...0.9$ )[22].

The last step in the production of arbolite is hardening with the help of heat. In this case, hardening is carried out by low-temperature and light-mode processing (at a temperature of 50...60°C and in a humid environment of 70...80%). In this mode, arbolite reaches the release strength at 18...20°C. Humidity is around 30...35%. Then the products are stored in a closed warehouse with a temperature of 16...18°C for 7 days. During this time, the products will reach the desired consistency, and their moisture will decrease[23].

When using arbolit, the costs of assembling structures are reduced, the panels can be prepared in the conditions of the enterprise in accordance with the size of the entire room (with door and window frames installed). Since arbolit has better heat preservation properties compared to expanded clay concrete, the thickness of the walls reconstructed from it will be thinner. In some constructions, when the usual materials are replaced with arbolite, the mass of the building decreases up to 1.3...1.5 times[24].

When using arbolite, cement consumption is reduced by 35...55 kg/m<sup>2</sup> per surface unit compared to expanded clay concrete. Table 1.2 shows the technical and economic indicators of 1m<sup>2</sup> of the outer wall made of arbolite and other materials[25].

Table 1.2

Technical and economic indicators of the outer wall built from different materials

Indicators	Single layer panel			External brick wall
	Arbolitli	Keramsite-concrete	serg'ovak betonli	
Average density, kg/m <sup>3</sup>	700	900	750	1800
thickness, cm	22	28	24	66
mass, kg	154	270	200	1200
accounting price, %	44	64	59	100
quoted costs, %	40	67	61	100
labor volume (production and assembly), working hours.	2,6	4,1	3,7	8,5

It is known from the production experience that in the construction of low-rise buildings, arbolite products can be effectively used instead of brick, expanded clay and aerated concrete. Also, according to a number of usage properties, it is higher than them[16].

In construction, arbolite blocks and panels, roof and partition plates, interior curtain wall panels, floor tiles, heat-retaining and sound-proofing plates, as well as volume-spatial constructions and cast constructions are effectively used. According to its description, arbolite is a very good wall material. Small-sized arbolite blocks are widely used in house construction (Fig. 1). Such blocks are mainly produced in 200x200x400, 200x250x500, 100x200x600, 150x300x600, 200x300x600 mm sizes. After the blocks are hardened with hot-moisture, they are removed from the molds and matured in the next stage in a closed warehouse (Fig.2)[26].



Figure 1. Arbolite block



Figure 2. Maturation of arbolite blocks in natural conditions in a warehouse

Arbolite blocks are made of heat-retaining, class V0.75...V1 and constructional arbolite, class V1.5...V2.

Structural arbolite class V2...V3.5 is used for making wall panels. The inner and outer parts of the panels are covered with concrete of class V10...V15 or a cement-sand mixture of grade 100 (Fig. 3). The thickness of the protective layer is selected depending on the humidity of the external environment and the conditions of their use.



Figure 3. Arbolite wall panel

Arbolite panels with an average density of 750 kg/m<sup>3</sup>, class V2.5 are used for construction of external walls of agricultural buildings (livestock, poultry, etc.). Their outer part is covered with a cement-sand mixture with a thickness of 2 cm, grade 100. Such panels are produced in thicknesses of 200, 240, 280, and 350 mm, heights of 600, 900, and 1200 mm, and lengths of 1500, 1700, 1800, 3000, 4500, and 6000 mm (Fig. 4).

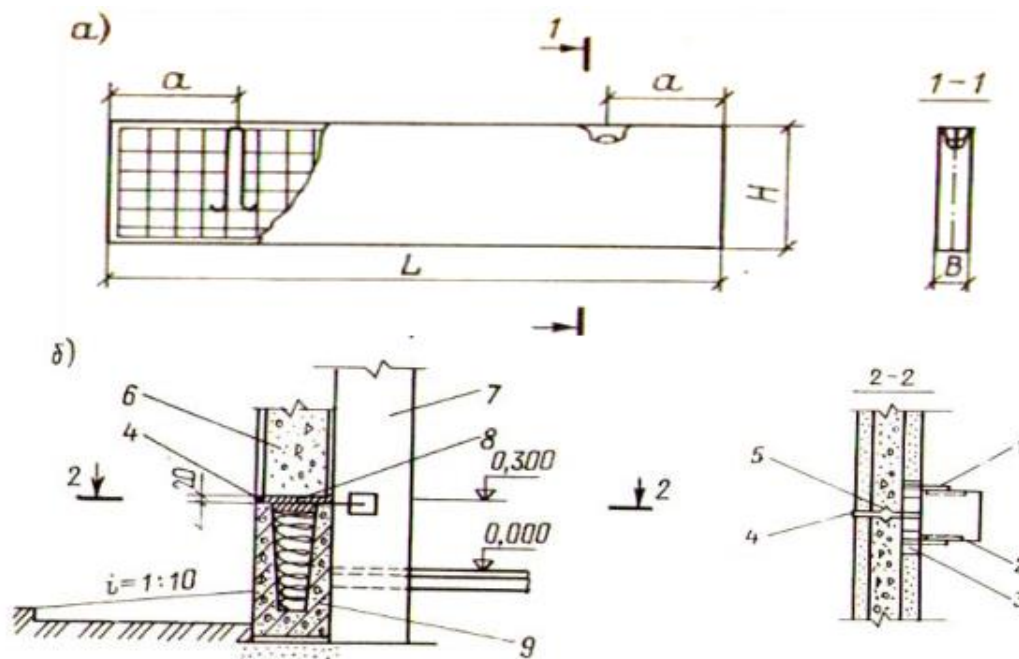
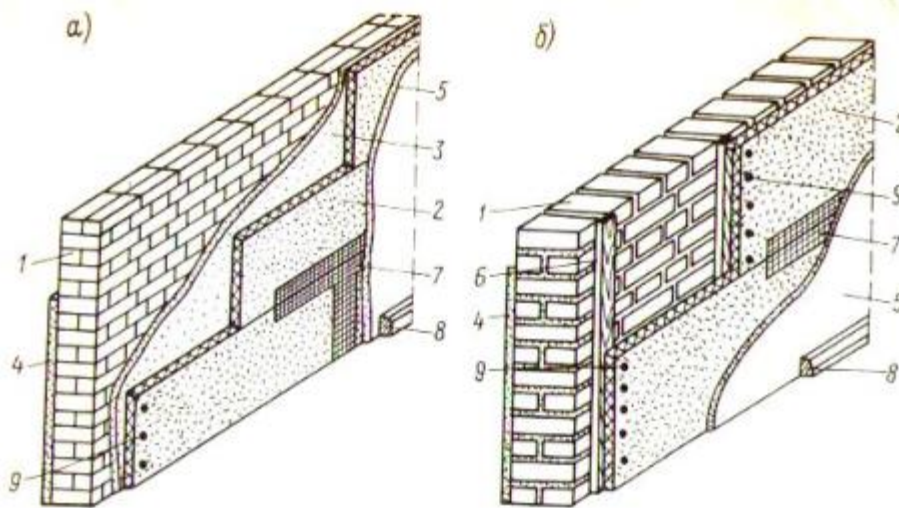


Figure 4. Single-layer arbolite wall panel. general view of a-panel; Installation of b-panel on the foundation block; 1-diameter 12 mm, class A-1 steel rod; Welding detail of the 2nd column; 3-base block welding detail; 4th mastic; 5-

**grade 50 cement-sand mixture; 6-arbolite wall panel; column 7; 8th layer of moisture protection**

Cement-fibrolite slabs are effectively used as structural heat-preserving fillers for frame constructions of standard wooden houses, to provide thermal protection of thin brick and concrete walls in various agricultural constructions. Also, fibrolite is used as a heat-retaining layer in wall and wall panels in residential construction, and as a heat protector in roof sheathing.

The advantages of cement fibrolite slabs are that they can be used as a formwork in the construction of various concrete structures. In such cases, they are left as an element of constructions and serve as a heat-retaining coating. In industrial construction, cement fibrolite is used as a warming coating material for brick walls (Fig. 5).



**Figure 5. Brick wall heating construction with cement fibrolite. a-by the mixture layer; b-by wood bruce. 1-brick wall; 2-fibrolite plate; 3-cement mixture; 4- external plaster; 5-internal plaster; 6-wood brush; 7th grid; 8-plinth; Mix 9**

35 mm thick acoustic cement-fibrolite plates are used as a sound-proof coating in industrial and public buildings. Painting and finishing of the surface of the plates is carried out after their seams are filled with the composition of the mixture. Polyvinyl acetate solutions with various colored powders are used for painting and finishing works.

Cement-chip boards (CCHB) are a new structural sheet material, made by pressing special wood chips and portland cement mass under high pressure. Sawdust from deciduous and deciduous wood is used as raw material. It is desirable that the average length of wood chips is at least 3 times larger than its width. That is, their length is 25...30 mm, width 1.6...4.8 and thickness 0.3...0.4 mm (UzRSt 896-98).

The production of cement-flake board consists of the following technological processes: storage of wood raw materials in a warehouse; preparation of shavings; homogenization and fractionation of shavings in grinders; preparation of cement-flake

mixture; molding and pressing of plates; hardening; maturation and condensation; treatment of the outer part (smoothing, application of lok-paint materials).

Such plates with a density of 1200...1400 kg/m<sup>3</sup> have high strength, are resistant to the external environment, do not burn, do not rot from biological effects, are well glued to wood, plastic and metals, and are easy to process. , can be nailed and x. k.High physical and mechanical parameters of cement-flake plates expand their field of application. Constructions based on sQP are effectively used in residential, industrial and agricultural construction. Such plates are widely used in covering external and internal walls, roofing of low-rise buildings, covering wooden and metal frames, suspended ceilings, floor coverings, as well as in the construction of energy-efficient heat-preserving wooden-frame residential buildings. They serve as external and internal cladding and formwork in wooden-framed buildings. After the plates are installed on the outside and inside of the wooden beams, the space is filled with heat-retaining materials. As a result, there is no need to finish the surface of the external walls.

The mass and materials of cement-flake tiles, as well as the cost of labor and cost in their preparation and installation, are cheap and convenient compared to other, for example, asbestos-cement, plywood, DVP, DSP or lightweight reinforced concrete tiles, which expands the field of application of such tiles.

#### **REFERENCES:**

1. Bafoev, A. X., Rajabboev, A. I., Niyozov, S. A., Bakhshilloev, N. K., & Mahmudov, R. A. (2022). Significance And Classification of Mineral Fertilizers. *Texas Journal of Engineering and Technology*, 5, 1-5.
2. R.A. Makhmudov, K.Kh. Majidov, M.M. Usmanova, Sh.M. Ulashov, & S.A.Niyozov. (2021). Characteristics Of Catalpa Plant As Raw Material For Oil Extraction. *The American Journal of Engineering and Technology*, 3(03),70–75. <https://doi.org/10.37547/tajet/Volume03Issue03-11>
3. Hujakulova, D. J., Sh M. Ulashov, and D. K. Gulomova. "TECHNOLOGY OF DEODORIZATION OF SOYABEAN OIL." *Galaxy International Interdisciplinary Research Journal* 9.12 (2021): 171-174.
4. Shodiev Z. O., Shodiev S., Shodiev A. Z. THEORETICAL BASIS OF EFFECTIVE SEPARATION OF COTTON FROM AIR FLOW //Современные инструментальные системы, информационные технологии и инновации. – 2021. – С. 12-15.
5. Ниёзов , С., Шарипов, Ш., Бердиев, У. ., Махмудов , Р. ., & Шодиев , А. . (2022). ТРУЩИНЫ, ВЫПУСКАЮЩИЕСЯ ПРИ ПРОИЗВОДСТВЕ ХЛОРИДА КАЛИЯ ИЗ СИЛЬВИНИТОВОЙ РУДЫ. *Journal of Integrated Education and Research*, 1(4), 440–444. Retrieved from <https://ojs.rmasav.com/index.php/ojs/article/view/302>

6. Ниёзов С.А., Шарипов Ш.Ж., Бердиев У.Р., & Шодиев А.З. (2022). ВЛИЯНИЕ НИТРАТ И НИТРИТОВ НА ОРГАНИЗМ. Journal of Integrated Education and Research, 1(4), 409–411. Retrieved from <https://ojs.rmasav.com/index.php/ojs/article/view/301>

7. Amanovich, M. R., Obitovich, M. S., Rakhmatilloevich, T. H., & Oybekovich, S. Z. (2021). The use of biological active additives (БАА) in the production of flour confectionery products. The American Journal of Engineering and Technology, 3(05), 134-138.

8. Mahmudov Rafik Amonovich, Shukrullayev Javohir Oybek ugli, Ereshboyev Husniddin Fazliddinovich, & Adizova Muqaddas Odil kizi. (2022). Improvement of Technology of Gypsum Production Raw Materials and Products in Production. Texas Journal of Multidisciplinary Studies, 6, 182–184. Retrieved from <https://zienjournals.com/index.php/tjm/article/view/1059>

9. Фатиллоев, Ш. Ф., Ш. Б. Мажидова, and Ч. К. Хайруллаев. "ВЛИЯНИЕ ДОБАВОК АЗОТНОКИСЛОТНОГО РАЗЛОЖЕНИЯ ФОСФОРИТОВ ЦЕНТРАЛЬНОГО КЫЗИЛКУМА НА ГИГРОСКОПИЧЕСКИЕ СВОЙСТВА АММИАЧНОЙ СЕЛИТРЫ." *Gospodarka i Innowacje*. 22 (2022): 553-556.

10. Kazakovich, Khayrullayev Chorikul, Fatilloev Shamshod Fayzullo o'g'li, Dehkonova Nargiza, and Jabborova Aziza. "STUDY OF THE POSSIBILITY OF USE OF LOCAL PHOSPHORITES AND SEMI-PRODUCTS OF THE PRODUCTION OF COMPOUND FERTILIZERS AS ADDITIVE TO AMMONIA NITRETE." *EPRA International Journal of Research and Development (IJRD)* 7, no. 4 (2022): 49-52.

11. Фатиллоев, Шамшод Файзулло Угли, Бехзод Мавлон Угли Аслонов, and Алишер Камилович Ниёзов. "ИЗУЧЕНИЕ МЕХАНИЧЕСКИХ СВОЙСТВ КОЖИ ОБРАБОТАННЫМИ ПОЛИМЕРНЫМИ КОМПОЗИЦИЯМИ." *Universum: технические науки* 11-4 (80) (2020): 49-51.

12. Исматов С. Ш., Норова М. С., Ниёзов С. А. У. Технология рафинации. Отбелка хлопкового масла с местными адсорбентами // *Вопросы науки и образования*. – 2017. – №. 2 (3). – С. 27-28.

13. Ниёзов, С. А., Махмудов, Р. А., & Ражабова, М. Н. (2022). ЗНАЧЕНИЕ АЗОТНОЙ КИСЛОТЫ ДЛЯ НАРОДНОГО ХОЗЯЙСТВА И ПРОМЫШЛЕННОСТИ. Journal of Integrated Education and Research, 1(5), 465–472. Retrieved from <https://ojs.rmasav.com/index.php/ojs/article/view/315>

14. Niyozov Sobir Ahror o'g'li, Fatilloev Shamshod Fayzullo o'g'li, & Bafoev Abduhamid Hoshim o'g'li. (2022). Non-Ferrous Metals and Their Alloys New Innovative Technologies in Production of Non-Ferrous Metals. *Neo Science Peer Reviewed Journal*, 3, 11–20. Retrieved from <https://www.neojournals.com/index.php/nsprj/article/view/31>



15. Narzullaeva, A. M., Khujakulov, K. R., Tursunova, D. H., & Teshayeva, M. S. (2020). Study of the Influence of the type of the catalyst on the technological process of hydration of higher fatty acids into alcohols, optimal parameters of the process, the industry of use of higher alcohols. *International Journal of Advanced Research in Science, Engineering and Technology*, 7(11), 15954-8.

16. Komilovna, H. M. U., Yormatova, D. Y., Tursunova, D. X., Kamolova, Z. M., & Teshayeva, M. S. (2021). Properties of the Soya Flour. *Annals of the Romanian Society for Cell Biology*, 9042-9046.

17. Олтиев А. Т., Хайдарова М. Ф., & Бозорова Д. Н. (2022). ПЕРСПЕКТИВЫ ТЕХНОЛОГИИ ПРОИЗВОДСТВА ЦУКАТ. *Galaxy International Interdisciplinary Research Journal*, 10(9), 279–284. Retrieved from <https://www.giirj.com/index.php/giirj/article/view/2636>

18. Mahmudov Rafik Amonovich, Shukrullayev Javohir Oybek ugli, Ereshboyev Husniddin Fazliddinovich, & Adizova Muqaddas Odil kizi. (2022). Improvement of Technology of Gypsum Production Raw Materials and Products in Production. *Texas Journal of Multidisciplinary Studies*, 6, 182–184. Retrieved from <https://zienjournals.com/index.php/tjm/article/view/1059>

19. Худойбердиев Н. С., Хайдарова М. Ф. ПРОЦЕСС МОДИФИКАЦИИ ЖИДКОГО СТЕКЛА ПОЛИМЕРАМИ //Galaxy International Interdisciplinary Research Journal. – 2022. – Т. 10. – №. 10. – С. 39-41.

20. Ихтиярова, Г. А., Турабджанов, С. М., Рахмонов, Ш. Т., & Улашев, Ш. ИНТЕНСИФИКАЦИЯ ПРОЦЕССА КРАШЕНИЯ ШЕРСТИ С ИСПОЛЬЗОВАНИЕМ ХИТОЗАНА И СЕРИЦИНА. *Узбекско-Казахский Симпозиум «Современные проблемы науки о полимерах» СБОРНИК ТЕЗИСОВ*, 145.

21. Улашев, Ш. М., & Ихтиярова, Г. А. ИНТЕНСИФИКАЦИЯ ПРОЦЕССА КРАШЕНИЯ ШЕРСТИ С ИСПОЛЬЗОВАНИЕМ СЕРИЦИНА И ХИТОЗАНА. *Узбекско-Казахский Симпозиум «Современные проблемы науки о полимерах» СБОРНИК ТЕЗИСОВ*, 146..

22. Ahror o'g'li, N. S., & Ahadovna, M. M. (2022, November). UCHTUT DOLOMITE MINERAL OF MINERALOGICAL PROPERTIES, CHEMICAL COMPOSITION AND EXTRACTION OF MAGNESIUM CHLORIDE. In E Conference Zone (pp. 79-87).

23. Niyozov, S., Amonova, H. I., Rizvonova, M., & Murodova, M. A. (2022). MINERALOGICAL, CHEMICAL COMPOSITION OF UCHTUT DOLOMITE MINERAL AND PHYSICO-CHEMICAL BASIS OF PRODUCTION OF MAGNESIUM CHLORIDE. *Journal of Integrated Education and Research*, 1(6), 32-38.

24. Ahror o'g'li, N. S., & Komil o'g'li, B. N. (2022, November). METHODS OF BENEFICIATION OF POTASH ORES AND TECHNOLOGICAL MINERALOGY OF POTASH ORES. In E Conference Zone (pp. 55-66).

25. Ahror o'g'li, N. S., Amonovich, M. R., & Komil o'g'li, B. N. (2022). METHODS OF BENEFICIATION OF POTASH ORES AND POTASH MINES. European Journal of Interdisciplinary Research and Development, 9, 59-69.

26. Ahror o'g'li, N. S., Amonovich, M. R., & Ilhom o'g'li, R. A. (2022). PHYSICO-CHEMICAL PRINCIPLES AND TECHNOLOGY OF PRODUCTION OF MAGNESIUM CHLORATE DEFOLIANT BASED ON LOCAL RAW MATERIALS AND SECONDARY PRODUCTS. Web of Scientist: International Scientific Research Journal, 3(11), 224-234.